

# RM1965 1U Rackmount Server with NVIDIA Tesla P100 GPU Accelerator

A perfect deep learning platform powered by a single 8 or 10 core IBM® POWER8 processor and NVIDIA® Tesla® P100 GPU Accelerator with NVIDIA NVLink™ technology.

The Cirrascale RM1965 POWER8®-based performance platform is a single-socket POWER8 machine that has eight DDR4 memory slots. The RM1965 platform supports up to 256GB of memory using 32GB memory sticks in eight DIMM slots. Additionally, the RM1965 platform supports a single 8 or 10 core POWER8 processor and provides the capability to support a single NVIDIA® Tesla® P100 Accelerator with NVLink.

The POWER8 is designed to be a massively multithreaded chip, with each of its cores capable of handling eight hardware threads simultaneously, for a total of up to 80 threads executed simultaneously on the 10-core POWER8 processor. The processor makes use of very large amounts of on- and off-chip eDRAM caches, and on-chip memory controllers enabling very high bandwidth to memory and system I/O. For most workloads, the chip is said to perform two to three times as fast as its predecessor (POWER7).

The Cirrascale RM1965 contains a NVIDIA® Tesla® P100 GPU Accelerator, the world's most advanced datacenter accelerator ever built. Powered by four ground-breaking technologies with discontinuous jumps in performance, Tesla P100 enables lightning-fast nodes to deliver the highest absolute performance for HPC and deep learning workloads with infinite computing needs.

Additionally, the NVIDIA Tesla P100 utilizes NVIDIA NVLink™ technology. NVIDIA NVLink is a high-bandwidth, energy-efficient interconnect that enables ultra-fast communication between the CPU and GPU, and between GPUs. The technology allows data sharing at rates 5 to 12 times faster than the traditional PCIe Gen3 interconnect, resulting in dramatic speed-ups in application performance and creating a new breed of high-density, flexible servers for accelerated computing.




## Benefits at a Glance

- POWER8 system perfect for deep learning applications.
- Supports a single NVIDIA Tesla P100 GPU Accelerator with NVLink.
- Open systems, open architecture solution that ensures easy future upgrades to the latest hardware.
- Supports up to 256GB of memory with up to 115GB/sec of memory bandwidth.
- Supports a POWER8 processor with 8 or 10 cores.

## Contact Us Today

To learn more about Cirrascale and its unique data center infrastructure solutions, please visit us on our website at [www.cirrascale.com](http://www.cirrascale.com) or contact one of our Account Managers by calling (888) 942-3800.

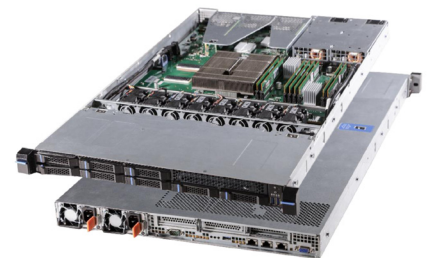

**RM1965 POWER8  
Rackmount Platform**

# Cirrascale RM1965 Development Platform

With the consistent advances in technology, Cirrascale engineering and development teams are constantly testing and deploying the latest technical specifications being offered by our technology partners. We make every effort to provide the below specifications error-free and up-to-date. However, we always encourage our customers to contact us to discuss Cirrascale's latest improvements to its products.

## Cirrascale RM1965 System Specifications

1U rackmount server chassis containing:

### Processor:

- Single IBM® POWER8® 8-core / 10-core processor
- Up to 190W TDP per processor

### Memory:

- 8 x memory DIMMs
- Supports up to 256GB of total system memory

### Storage:

- 8 x SATA III 6.0Gb/s HDDs

### Networking & Management:

- IPMI 2.0 Compliant
- ASPEED chipset

### Expansion Slots:

- 1 x PCI Express Gen3 x16 (CAPI Enabled)
- 2 x PCI Express Gen3 x8

### Accelerator Support:

- Single NVIDIA® Tesla® P100 GPU Accelerator

### Power:

- Redundant Hot-swap 1200W ATX power supplies x 2

### Input / Output (IO)


- 3 x USB 3.0, 1 x VGA, 1 x RS-232
- 3 x 1G RJ45 (1 x BMC Shared NIC)

### Dimensions:

- Height: 43.2mm (1.7 in.)
- Width: 429.3mm (16.9 in.)
- Depth: 596.9mm (23.5 in.)

### Operating System Support:

- Ubuntu 16.04 LE
- Redhat 7.3 LE

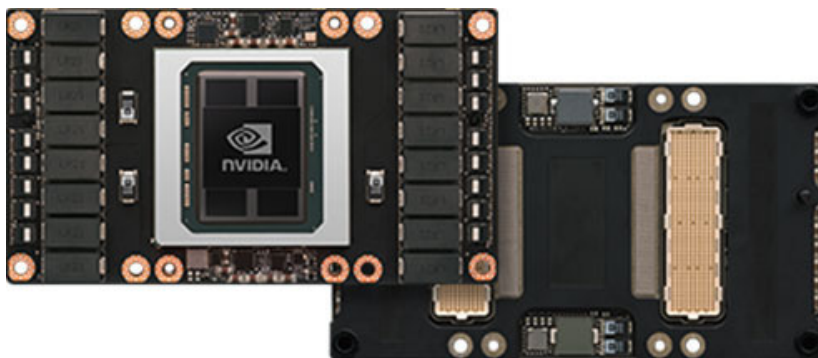

## NVIDIA Tesla P100 with NVLink

Tesla P100 with NVIDIA NVLink technology enables lightning-fast nodes to substantially accelerate time-to-solution for strong-scale applications. A server node with NVLink can interconnect up to four Tesla P100s at up to 5X the bandwidth of PCIe. It's designed to help solve the world's most important challenges that have infinite compute needs in HPC and deep learning.

CM085 - REV A - 11/2016

**Cirrascale** 12140 Community Road, Poway, CA 92064 USA **Phone** 858-874-3800 or 888-942-3800 **Web** [www.cirrascale.com](http://www.cirrascale.com)

© 2016, Cirrascale Corporation. All Rights Reserved. Cirrascale, BladeRack and the Cirrascale logo are registered trademarks of Cirrascale Corporation. NVIDIA, the NVIDIA logo, CUDA, Kepler, and Tesla are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. IBM and POWER8 are trademarks or registered trademarks of International Business Machines, Inc. in the U.S. and other countries. Other company and product names may be trademarks of the respective companies with which they are associated. No part of this document may be reproduced without consent from Cirrascale Corporation. Technical specifications subject to change without notice.

